


## SPECIFICATIONS:

|                        |                     |
|------------------------|---------------------|
| Nominal Voltage:       | 1.4V                |
| Rated Capacity:        | 85mAh               |
|                        | at 3000Ω            |
|                        | to 0.9V             |
|                        | at 25°C RH 60%      |
| Average weight         | 0.31g               |
| Volume:                | 0.08cm <sup>3</sup> |
| Terminals:             | FLAT                |
| Operating Temp. Range: | 0°C to 50°C         |
| Impedance:             | ≤ 8Ω                |
|                        | at AC 1000Hz        |
| Limiting current:      | 3mA                 |
|                        | @1.1V               |
| IEC:                   | PR70                |

## DISCHARGE CHARACTERISTICS AT 3KΩ 25°C RH 60%

(Discharged 24 hours /day)

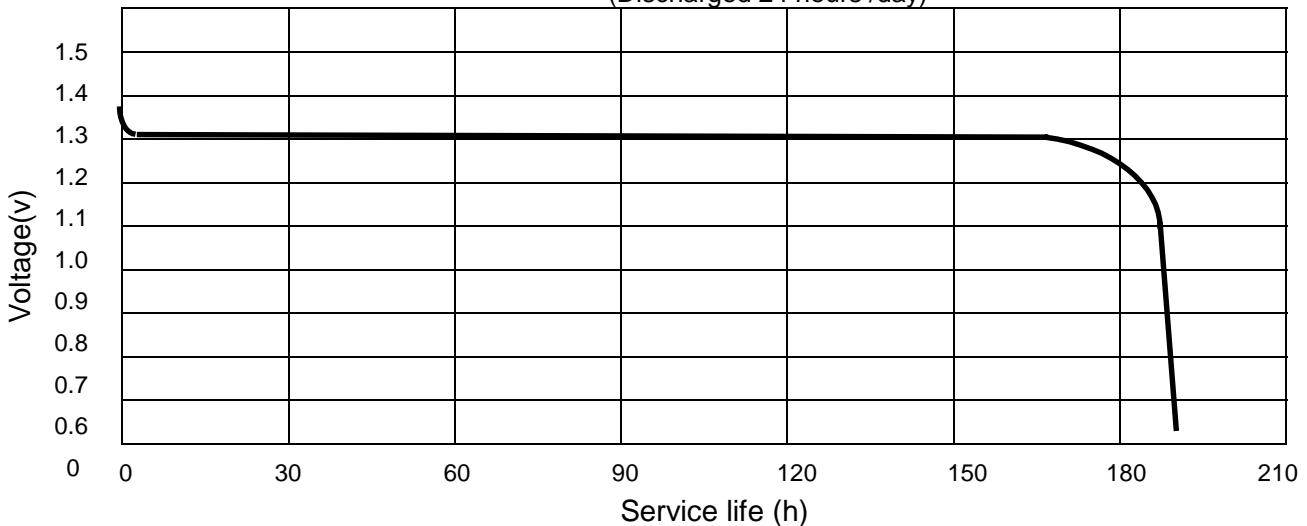

### Zhuhai Zhi Li Battery Co., Ltd.

10/F, Bildg.10, Xiang Zhou North Ind.Park,

Zhuhai, GD 519002, China

E-mail: [info@zeni power. com](mailto:info@zeni power. com)

Home Page: [www. zeni power. com](http://www. zeni power. com)

Tel: +86-756-2526620 Fax:+86-756-2526630

This data sheet is subject to change without prior notice.  
Contact us for the latest information. Contents here do not  
constitute a warranty. April, 2004