


SPECIFICATIONS:

Nominal Voltage:	1.4V
Rated Capacity:	600mAh
	at 620 Ω
	to 0.9V
	at 25°C 60%RH
Average Weight:	1.82g
Volume:	0.56cm ³
Terminals:	FLAT
Operating Temp. Range:	0°C to 50°C
Impedance:	≤ 2Ω
	at 1000Hz
Limiting Current:	16mA
	@1.1V
IEC:	PR44

DISCHARGE CHARACTERISTICS AT 620Ω 25°C 60% RH

(Discharged 24 hours /day)

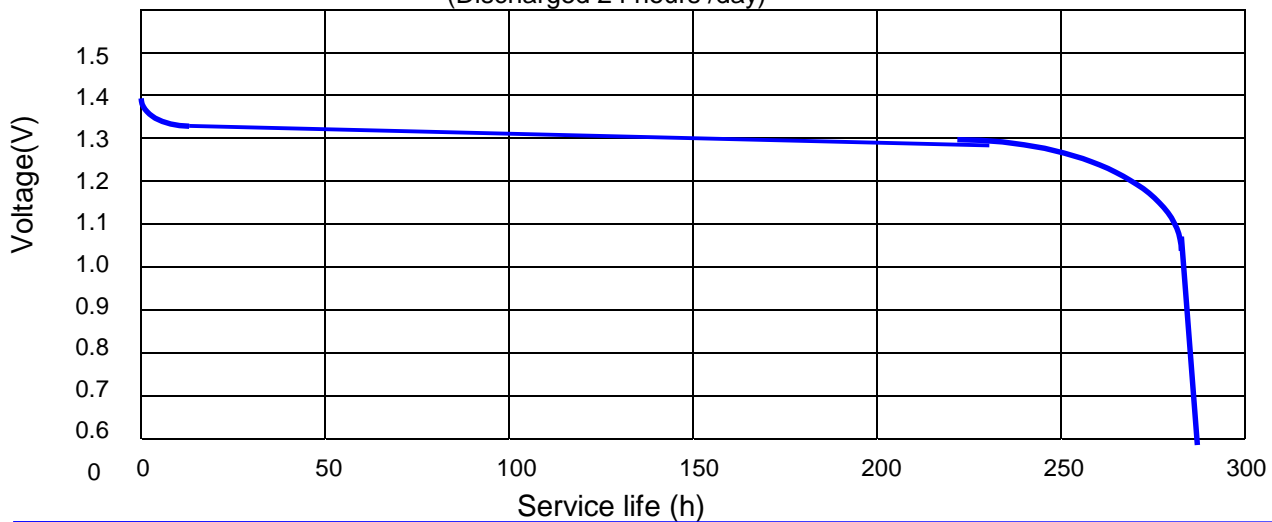

Zhuhai Zhi Li Battery Co., Ltd.

7/F, Bldg.10, Xiang Zhou North Ind.Park,

Zhuhai, GD 519002, China

E-mail: info@zeni power. com

Home Page: www. zeni power. com

Tel: +86-756-2526620 Fax:+86-756-2526630

This data sheet is subject to change without prior notice.
 Contact us for the latest information. Contents here do
 not constitute a warranty. April, 2003