

Specification of CR-P2

High Power Cylindrical Crimp-sealed
Primary Lithium Battery


Nominal Capacity * ¹		1400 mAh
Nominal Voltage		6 V
Standard Discharge Current		10 mA
Max. Discharge Current	Continuous * ²	1500 mA
	Pulse * ³	3500 mA
Temperature Range		-40°C ~ +60°C
Weight		37 g
Dimensions	Length (L)	34,8 mm
	Width (W)	19,5 mm
	Height (H)	35,8 mm

*1 Nominal capacity is determined to an end voltage of 4,0V when the battery is allowed to discharge at a standard current level at 23°C.

*2 Current value is determined so that 50% of the nominal capacity is obtained with an end voltage of 4,0V at 23°C.

*3 Current value for obtaining 2,0V cell voltage when 15 sec. pulse applied at 50% discharge depth (23°C).

Dimensions

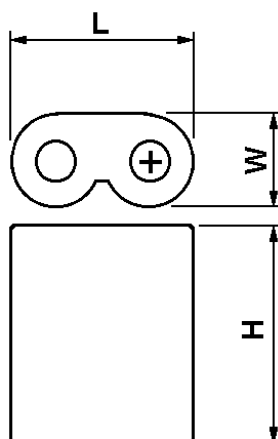

Size with case:

L = 34,8_{-0,5}

W = 19,5_{-0,5}

H = 35,8_{-0,5}

(unit: mm)