


Mi Battery Experts

Model H300-AAAA

Specifications of single cell

Nominal voltage		1.2V	
Capacity		0.2CA	1.0CA
		Discharge	Discharge
	Typical	315min	57min
Dimensions	Minimum	300min	54min
		mm	
	Diameter	8.5 ^{-0.5}	
Weight(Approximately)	Height	39.3 ^{-0.5}	
		gram	
Internal Impedance At 1000 Hz		≤55mΩ (After Charge)	
Charge	Standard	30mA(0.1CA)×16h	
	Rapid	300mA(1.0CA)×1.2h	
Ambient temperature		°C	
	Charge	standard	0°C to 45°C
		Rapid	10°C to 40°C
	Discharge		-20°C to 65°C
	Storage		-20°C to 45°C

Dimensions with tube

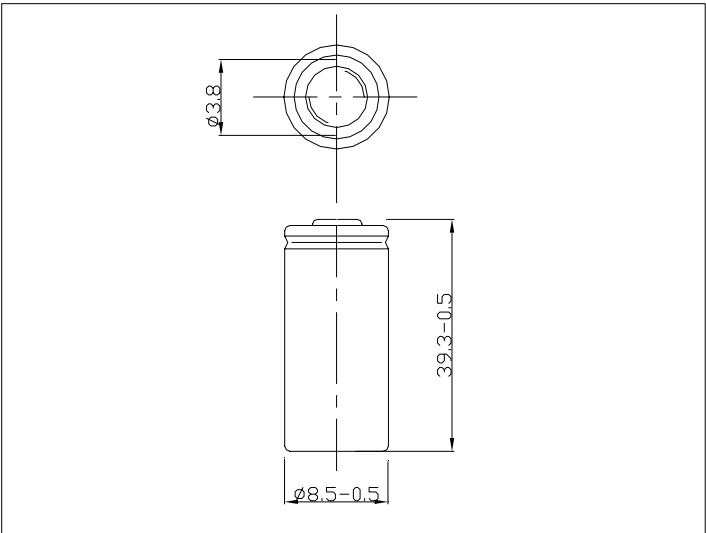


Note:


1. Nominal capacity, rated at 0.2CA 20°C.
2. Average capacity, for reference only.
3. Weight and internal impedance are For reference only.
4. Standard according as IEC of test cycle life.

Typical characteristics


Standard charge characteristics

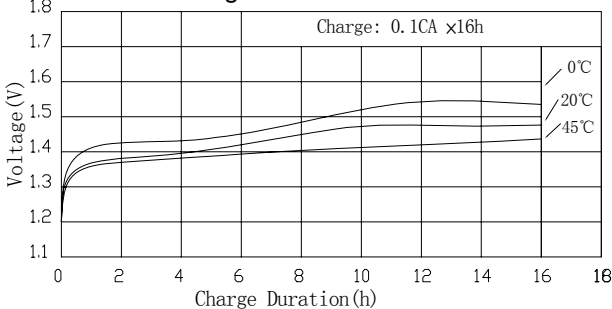


Rapid charge characteristics

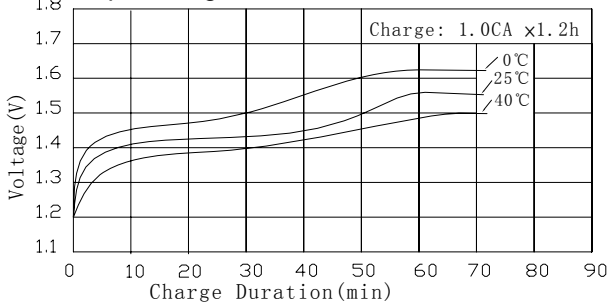

Discharge characteristics

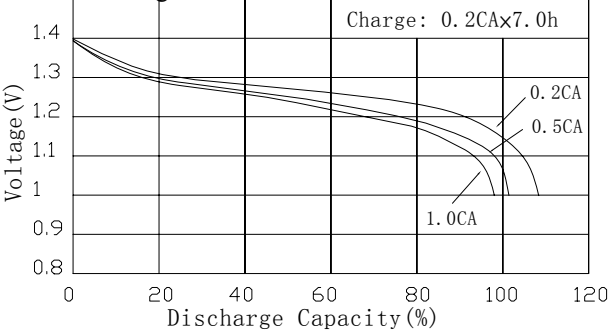

Cycle life characteristics

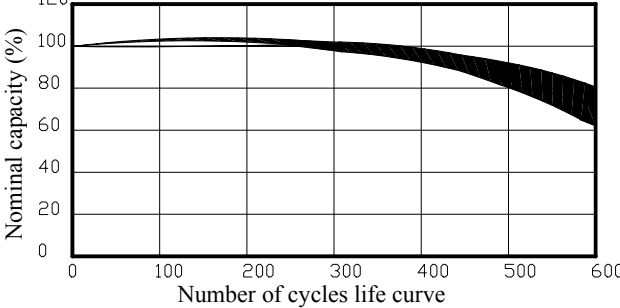

Charge retention curves of Ni-MH cylindrical cell at various storage temperature

