

1

2

3

4

5



6


A

B




C

D

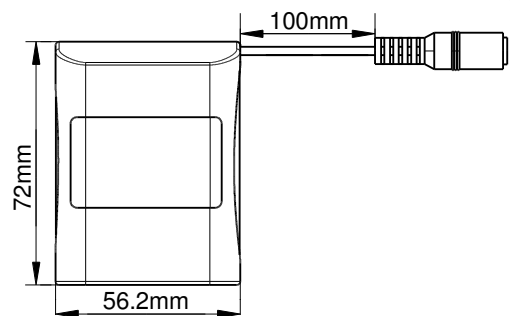



**PANASONIC**  
 RECHARGEABLE  
**LICB-18650-3S2P-HC-R**  
 10.8V 3.35Ah 36.18Wh Lilon  
 Assembled in Australia  
 (RL816) (247196) (TJ)

White Shrink

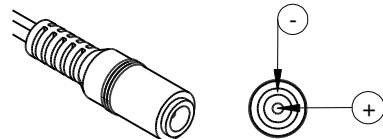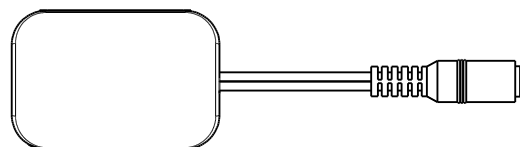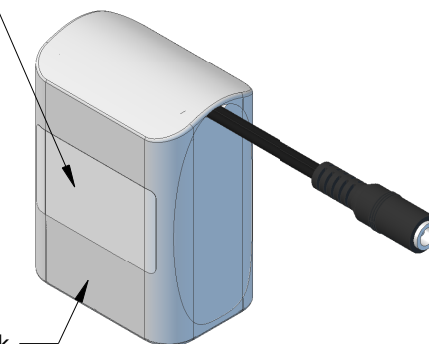

Lithium Warning Label

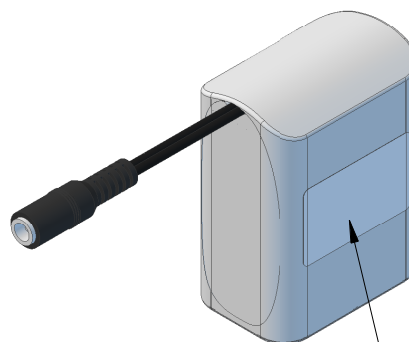

  
**Master Instruments**

This drawing and the designs  
 so represented are the  
 copyright property of Master  
 Instruments Pty Ltd. The  
 drawing shall not be copied,  
 loaned or issued without the  
 express written permission  
 of a duly authorised  
 representative of Master  
 Instruments Pty Ltd.

PART NO	RL816	STOCK CODE	88003-113	RevNo	0
CELL TYPE	NCR18650B	RECOMMENDED CHARGER	3P10L1012-2.1mm or FY126xxx	DATE	11/12/15
				PAGE	1 OF 1

### Technical Data

#### Safety Board (PCM)

PCM	MIPCM-3SXP7A
Over Charge Detection Voltage	4.35V ± 0.025V
Over Charge Release Voltage	4.15V ± 0.05V
Over Discharge Detection Voltage	2.4V ± 0.08V
Over Discharge Release Voltage	3.0V ± 0.10V
Over Current Detection Current	10A ± 2A
Max Discharge Current	7A
Short Circuit Protection	External Short Circuit
Protection Circuit Resistance	≤50mΩ
PTC Resettable Fuse	N/A
Thermistor	N/A
Chemistry	Lilon
Configuration	3S2P
Voltage	10.8V
Capacity	6.7Ah
Energy	72.36Wh
Weight	297g
Rated Discharge	1.28A (C/5)
Max Discharge Continuous	PCM: 7A
	Cell: 7A (PCM Limit)
Charge Rate	3.25A
Operating Temperature Range	Charge: 10 - 45°C
	Discharge: -20 - 60°C
Charge Voltage	12.6V
Discharge End Voltage	9V
Connector	CE180 2.1mmID x 5.5mmOD DC Plug
Suits Mating Connector	P4215 DC Plug Male 2.1mmID x 5.5mmOD Jack

1

2

3

6