

# Drypower

VRLA AGM CYCLIC RANGE  
**DEEP CYCLE POWER**



12V

15Ah

SLA

CYCLIC  
AGM

## 12SB15C

Rechargeable AGM Sealed Lead Acid Battery

### SPECIFICATIONS

|  |                |  |
|--|----------------|--|
| <b>Nominal Voltage</b>                       | 12V            |  |
| <b>Nominal Capacity</b>                      |                |  |
| 20 hour rate (0.75A to 10.50V)               | 15Ah           |  |
| 10 hour rate (1.34A to 10.50V)               | 13.4Ah         |  |
| 2 hour rate (6A to 9.60V)                    | 12Ah           |  |
| 1C (15A to 9.60V)                            | 8.5Ah          |  |
| 3C (45A to 9.60V)                            | 3Ah            |  |
| <b>Weight</b>                                | Approx. 4.5kg  |  |
| <b>Internal Resistance (at 1KHz)</b>         | Approx. 9mΩ    |  |
| <b>Maximum Discharge Current (5 secs)</b>    | 225A           |  |
| <b>Charge Methods at 25°C</b>                |                |  |
| <b>Cycle Use</b>                             |                |  |
| Charging Voltage                             | 14.4V to 15.0V |  |
| Coefficient -5.0mV/°C/Cell                   |                |  |
| Maximum Charging Current                     | 4.5A           |  |
| <b>Standby Use</b>                           |                |  |
| Float Charging Voltage                       | 13.5V to 13.8V |  |
| Coefficient -3.0mV/°C/Cell                   |                |  |
| <b>Operating Temperature Range</b>           |                |  |
| <b>Charge</b>                                | -15°C to 40°C  |  |
| <b>Discharge</b>                             | -15°C to 50°C  |  |
| <b>Storage</b>                               | -15°C to 40°C  |  |
| <b>Charge Retention (Shelf Life) at 20°C</b> |                |  |
| 1 month                                      | 92%            |  |
| 3 months                                     | 90%            |  |
| 6 months                                     | 80%            |  |
| <b>Case Material</b>                         | ABS UL94 HB    |  |
| <b>Termination</b>                           | F6 (M5 Bolt)   |  |
| <b>Design Life</b>                           | 3-5 years      |  |

**Classified as a non-spillable battery. Approved for transportation by:**

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



**Barcode**




9319632520864




### DIMENSIONS

mm (inch)

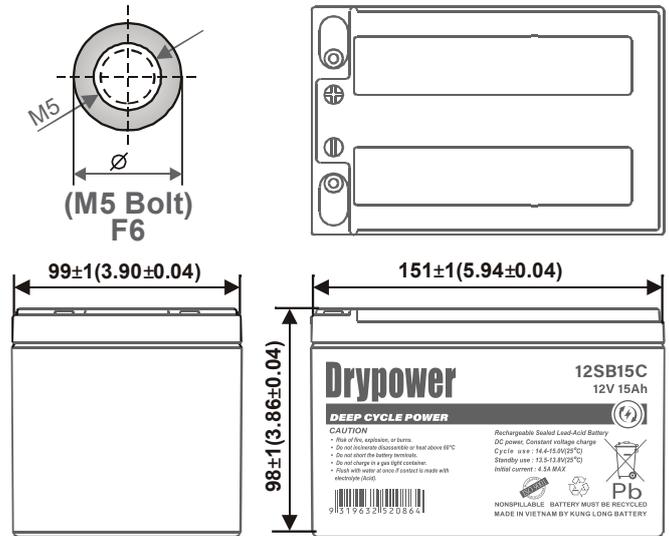


### Discharge Time VS. Discharge Current (25°C)

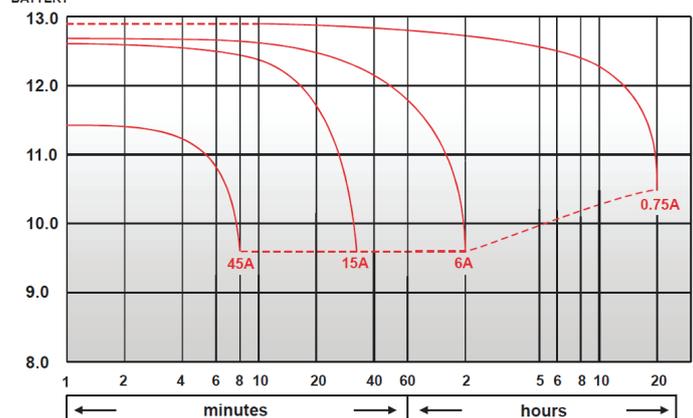


Discharge Time

### CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C(77°F)

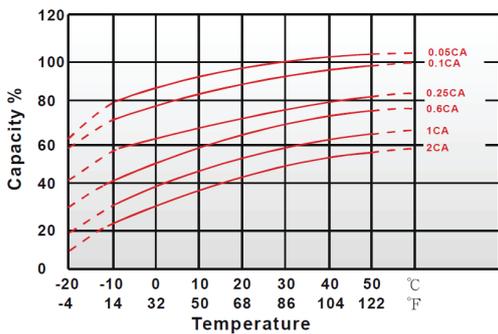


Capacity Retention Characteristic

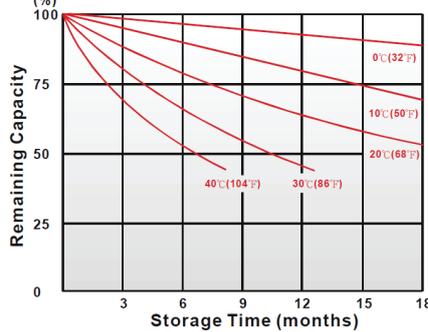

Cycle Service Life

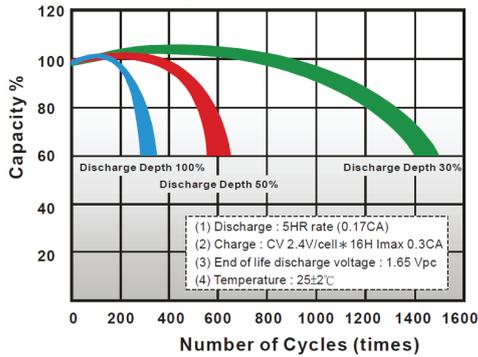

Trickle (or float) Service Life

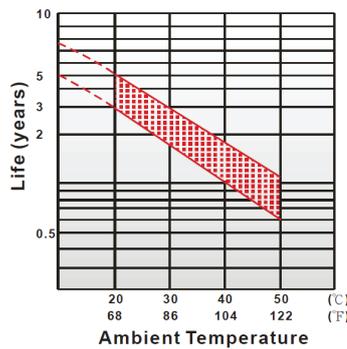

### FEATURES & BENEFITS

- ◆ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ◆ Special grid frame alloy design with outstanding anti-corrosion performance.
- ◆ Maintenance free technology and non-spillable design.
- ◆ Suitable for use in any orientation (except inverted) for use in hard to reach locations.
- ◆ Higher percentage of tin content compared with the industry standard. Tin extends battery standby life by minimising sulphation (corrosion) especially at higher temperatures.
- ◆ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam. KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025. KLB supports Green Sustainable supply chain practices.



### PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

| End Voltage |     | 1.85V | 1.80V | 1.75V | 1.70V | 1.67V | 1.65V | 1.60V |
|-------------|-----|-------|-------|-------|-------|-------|-------|-------|
| 5           | min | 87.6  | 93.9  | 98.6  | 104   | 110   | 113   | 116   |
| 10          | min | 59.9  | 71.4  | 72.9  | 74.1  | 74.8  | 75.6  | 76.3  |
| 15          | min | 49.4  | 54.4  | 56.1  | 57.3  | 58.1  | 59.6  | 60.6  |
| 30          | min | 29.8  | 31.6  | 32.5  | 33.6  | 34    | 34.2  | 34.8  |
| 60          | min | 17.2  | 17.9  | 18.6  | 19    | 19.2  | 19.3  | 19.5  |
| 120         | min | 9.72  | 10.2  | 10.4  | 10.7  | 10.7  | 10.8  | 11    |
| 180         | min | 6.95  | 7.17  | 7.33  | 7.46  | 7.51  | 7.55  | 7.65  |
| 240         | min | 5.42  | 5.69  | 5.87  | 5.93  | 5.96  | 5.99  | 6.01  |
| 300         | min | 4.6   | 4.72  | 4.8   | 4.87  | 4.91  | 4.94  | 4.96  |
| 600         | min | 2.76  | 2.79  | 2.83  | 2.86  | 2.89  | 2.98  | 3     |
| 1200        | min | 1.43  | 1.49  | 1.53  | 1.56  | 1.59  | 1.6   | 1.61  |

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

| End Voltage |     | 1.85V | 1.80V | 1.75V | 1.70V | 1.67V | 1.65V | 1.60V |
|-------------|-----|-------|-------|-------|-------|-------|-------|-------|
| 5           | min | 46.3  | 51    | 55.3  | 59.5  | 62.8  | 64.3  | 67.7  |
| 10          | min | 32.4  | 39.7  | 41.7  | 42.3  | 44    | 44.4  | 46.3  |
| 15          | min | 26.7  | 30.2  | 32.1  | 32.3  | 33.8  | 34.7  | 36.3  |
| 30          | min | 16.1  | 17.5  | 18.6  | 19.7  | 20.6  | 20.8  | 21.8  |
| 60          | min | 8.8   | 9.22  | 9.56  | 9.83  | 10    | 10.1  | 10.1  |
| 120         | min | 4.74  | 4.95  | 5.07  | 5.19  | 5.22  | 5.28  | 5.51  |
| 180         | min | 3.48  | 3.57  | 3.65  | 3.71  | 3.73  | 3.77  | 3.83  |
| 240         | min | 2.69  | 2.74  | 2.81  | 2.87  | 2.89  | 2.94  | 2.99  |
| 300         | min | 2.34  | 2.39  | 2.42  | 2.45  | 2.46  | 2.48  | 2.5   |
| 600         | min | 1.23  | 1.29  | 1.34  | 1.37  | 1.38  | 1.39  | 1.4   |
| 1200        | min | 0.692 | 0.741 | 0.75  | 0.756 | 0.758 | 0.761 | 0.764 |

All data on the spec. sheet is an average value:

The tolerance range : X < 6min (+15%~-15%), 6min ≤ X < 10min (+12%~-12%), 10min ≤ X < 60min (+8%~-8%), X ≥ 60min (+5%~-5%)

Aug2020

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.