


# Poly-carbonmonofluoride Lithium Batteries: Individual Specifications

## BR-1/2AA

### ■ Dimensions(mm)

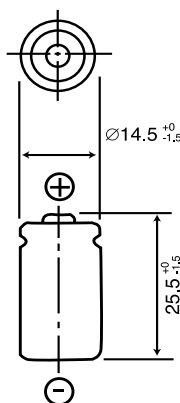


Weight:13.5g

### ■ Specification


|                               |            |
|-------------------------------|------------|
| Nominal voltage (V)           | 3          |
| Nominal capacity (mAh)        | 1,000      |
| Continuous standard load (mA) | 2.5        |
| Operating temperature (C)     | -40 ~ +100 |

### ■ Temperature Characteristics

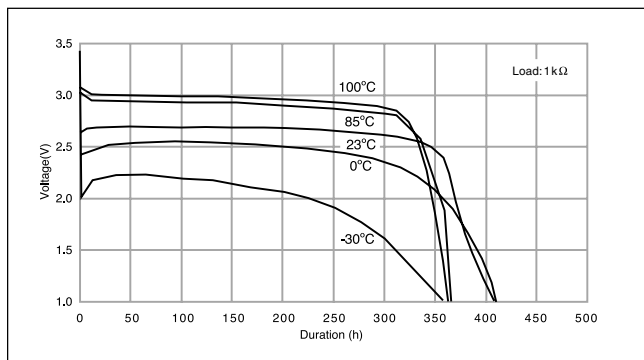

## BR-2/3A

### ■ Dimensions(mm)

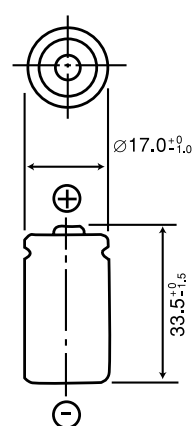


Weight:13.5g

### ■ Specification

|                           |           |
|---------------------------|-----------|
| Nominal voltage(V)        | 3         |
| Nominal capacity(mAh)     | 1,200     |
| Continuous drain(mA)      | 2.5       |
| Operating temperature(°C) | -40 ~ +85 |

### ■ Temperature Characteristics

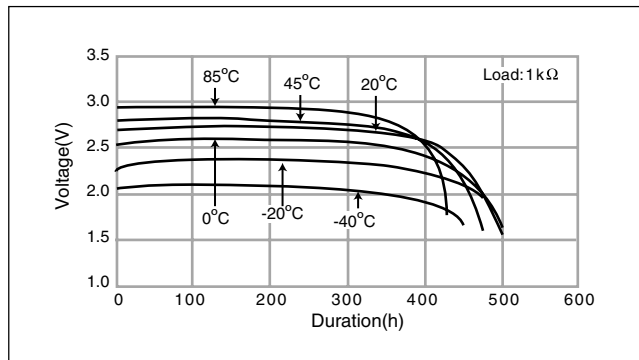

### ■ Operating voltage vs. Discharge current(voltage at 50% discharge depth)

